




magnetonmove.com

Round Electromagnetic Separator Series MC03(RCDY)

This product series is designed for long term operating shift provided with adjustable hook in its suspending system to adjust erection and installation height conveniently. It provides the most effective removal of the magnetic tramp iron from thicker materials bed and coal. hard coke, ores, limestone, spall, corns and wooden shavings under bigger granularity.

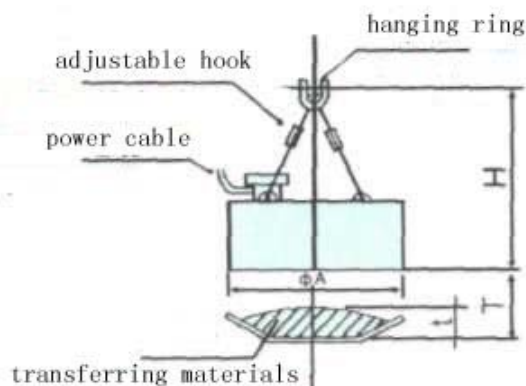

overall dimension sketch



Main technical data

TD-100%

Model	T (mm) Erection height	(mm) Belt width	(mm) overall dimension		voltage (V)	power (KW)	Mass (kg)	Commutation
			φ A	H				Controlling unit
MC03-30T (RCDY-3)	100	300	300	600	DC-48	0.18	77.5	SSTM-0.5D-D
MC03-40L (RCDY-3A)	120	350	400	740	DC-50	0.48	120	
MC03-50L (RCDY-4)	150	400	500	700	DC-75	0.8	198	SSTM-1.5D-D
MC03-60L (RCDY-5)	180	500	600	1000	DC-110	1.15	318	
MC03-70L (RCDY-6A)	210	600	700	860		1.89	500	SSTM-3.1D-D
MC03-80L (RCDY-6)	250	650	800	900		2.36	640	
MC03-90L (RCDY-8A)	260	750	900	1140		2.48	968	
MC03-100L (RCDY-8)	290	800	1000	890	DC-220	3.94	1070	SSTM-4.2D-D
MC03-110L (RCDY-9)	320	900	1100	1450		4.1	1079	SSTM-6.2D-D
MC03-130L (RCDY-10)	400	1000	1300	1200		6.18	2036	
MC03-150L (RCDY-12)	420	1200	1500	1350		8.58	3100	SSTQ-9.3D-D
MC03-165L (RCDY-14)	460	1400	1650	1500		10.5	4028	SSTQ-12D-D
MC03-180L (RCDY-16)	500	1600	1800	1640		11.1	4882	

Note: This product series MC introduces Japanese production standard; Series RCDY are previous department standard.