




magnetonmove.com

### Self-discharge Electromagnetic Separator Model Series MC12(RCDD)

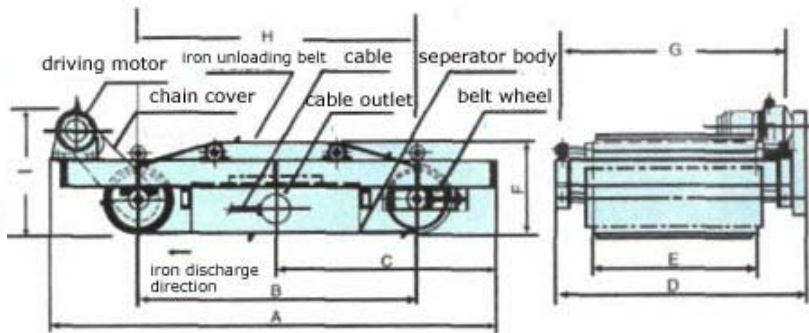

product series is designed for long term operating tied with self-discharge function and semi-spheretic field.installed with continuous operating trump iron discharging conveyor which helps to throw the magnetic material into the iron collection tray.It is moving the magnetic iron particles from thebed of the material and material under bigger granularity such as ores.coals.hard cokes,limestone and etc.

**Main technical data**

TD-100%

Model	T (mm) Erection height	(mm) Belt width	voltage (V)	power (KW)	overall dimension (mm)							Driven power (kw)	Mass (kg)	Commutation Controlling unit
					A	B	C	D	G	H	I			
MC12- 5060L (RCDD-4)	160	400	110	1.03	2300	1330	1100	914	710	850	720	1.5	1074	SSTM-1.5D1-D
MC12-6070L (RCDD-5)	170	500	110	1.4	2400	1400	1150	1068	860	928	720	1.5	1074	
MC12-7080L (RCDD-6A)	220	600	110	1.8	2550	1250	1250	1120	915	1000	755	1.5	1330	SSTM-3.1D1-D
8090L (RCDD-6)	250	650	110	2.6	2750	1600	1360	1270	1065	1100	782	2.2	1470	
MC12-90105L (RCDD-8)	250	800	110	2.9	2900	1770	1465	1480	1165	1200	768	2.2	2000	
MC12-110130L (RCDD-10)	310	1000	220	4.2	3200	2000	1590	1680	1375	1400	782	2.2	2700	SSTM-6.2D1-D
MC12-130145L (RCDD-12)	350	1200	220	5.8	3460	2310	1680	1853	1584	1650	886	4	4200	
MC12-150175L (RCDD-14)	410	1400	220	8.2	3800	2620	1850	1990	1780	1920	945	4	6020	SSTQ-9.3D1-D
MC12-165190L (RCDD-16)	450	1600	220	9.8	3850	2700	1950	2250	1930	1900	1050	4	8260	SSTQ-12D1-D
MC12-180210L (RCDD-18)	490	1800	220	11.6	4400	3000	2100	2420	2087	2100	1072	5.5	7900	

MC12-230230L (RCDD-20)	550	2000	220	22.5	4600	3400	2250	3000	2700	2100	1320	5.5	15500	SSTQ-25D1-D
MC12-250250L, (RCDD-22)	550	2200	220	25	4800	3200	2150	3200	3000	2300	1380	7.5	17500	

©Copyright 2007 YUXIANG Magnetic Materials Ind. Co.,Ltd.All Rights Reserved.