


RCTG series permanent magnetic pulleys

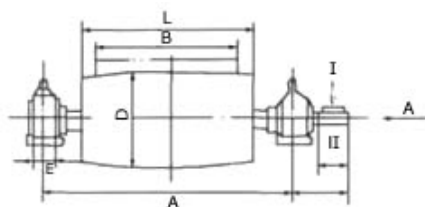




RCTG series permanent magnetic pulleys appearance size and installation size sketch map

The permanent-magnet wheel is suitable for purification treatment of removing iron and fines coming from the conveyor system used in coal mining industry, power industry and sugar refining industry, and for recovery of the steel dregs and iron removing from the sugarcane dregs in sugar refining factory.

RCTG series permanent magnetic pulleys suit used for separation iron in transport system of coal, power, sugar etc. industries. It can purify deal with powder material, retrieve use steel dregs etc. which can prevent grinders and crushers and squeezer damaging and wearing. The equipment widely used in metallurgical, mining, power, sugar, chemical, glass, papermaking, building materials, food etc. industries.

The series permanent magnetic pulleys can suit various environment, and installation and maintenance easy, magnetic field stable, attract force strong, may continual work, auto-discharge iron, operate simple, needn't control power source.

The series product through appraisal of Jinansu province in 1992. The function better compare same equipment of domestic and reach advanced level of home and abroad. It may content use need of high magnetic field strength and depth get rid of iron.

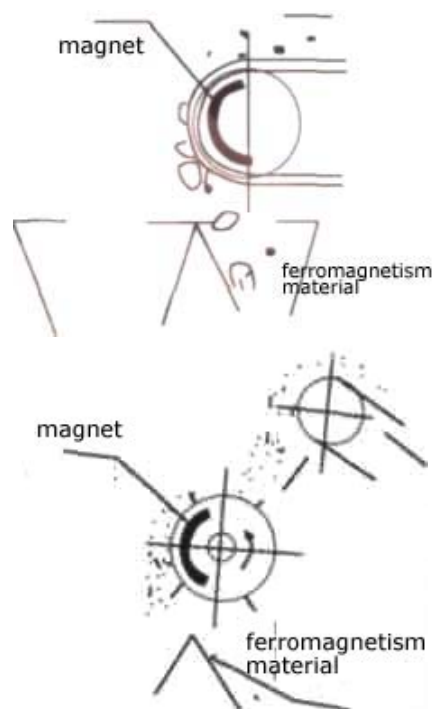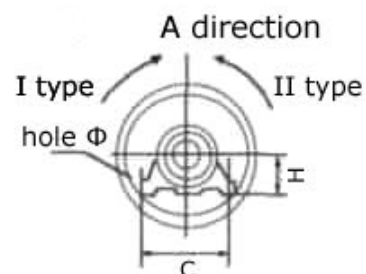

installation way sketch map

model	B	D	A	L	C	E	F	I	H	d	b	t	Hole Φ
RCTG-50/50	500	500	850	600	350	/	223.5	100	120	60	18	64	24
RCTG-50/65	650	500	1000	750	350	/	223.2	100	120	60	18	64	24
RCTG-50/80	800	500	1300	950	350	/	223.5	100	120	60	18	64	24
RCTG-63/65	650	630	1000	750	380	80	223.5	135	140	90	25	95	28
RCTG-63/80	800	630	1300	950	380	80	296	175	140	90	25	95	28
RCTG-63/100	1000	630	1500	1150	380	80	296	175	140	90	25	95	28
RCTG-63/120	1200	630	1750	1400	440	90	365	215	160	110	36	118	34
RCTG-80/80	800	800	1300	950	380	80	296	175	140	90	25	95	28
RCTG-80/100	1000	800	1500	1150	440	90	365	215	160	110	36	118	34

RCTG-80/120	1200	800	1750	1400	440	90	365	215	160	110	36	118	34
RCTG-80/140	1400	800	2000	1600	440	90	365	215	160	110	36	118	34
RCTG-80/160	1600	800	2200	1800	480	100	431	255	180	130	36	138	34
RCTG-80/180	1800	800	2400	2000	480	100	431	255	180	130	36	138	34
RCTG-100/100	1000	1000	1500	1150	480	100	431	255	180	130	36	138	34
RCTG-100/120	1200	1000	1750	1400	480	100	431	255	180	130	36	138	34
RCTG-100/140	1400	1000	2000	1600	540	110	465	275	200	150	45	160	34
RCTG-100/160	1600	1000	2200	1800	540	110	465	275	200	150	45	160	34
RCTG-100/180	1800	1000	2400	2000	540	110	465	275	200	150	45	160	34
RCTG-100/200	2000	1000	2600	2200	590	120	535	335	170	150	45	180	40
RCTG-100/220	2200	1000	2900	2200	590	120	535	335	170	150	45	180	40

©Copyright 2007 YUXIANG Magnetic Materials Ind. Co.,Ltd.All Rights Reserved.