




magnetonmove.com

Lifting Electromagnet Model Series MW92 for Handling Small Square Billets and Steel Ingots

Applications:

The movable magnetic -pole block, which is installed in magnetic-pole of electromagnet, Can stretch out and draw back after contacting the attached material. Consequently it it can obtain the maximum contacting area. It is suitable for lifting many pieces of different length of blooming billets, pipe billets and stagger arrangement cast ingots.

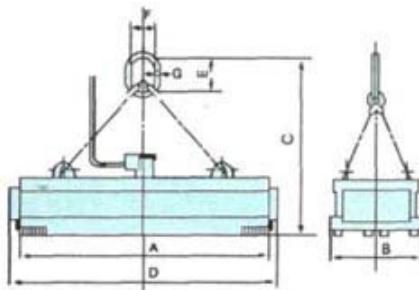

overall dimension sketch



Model	overall dimension (mm)							M Mass (kg)	curren (A)	Power (kw)	Lifting capacity length (m)xnumber of piece			
	A	B	C	D	E	F	G				110×110 (mm)	130×130 (mm)	150×150 (mm)	200×200 (mm)
MW92-10060L	1000	600	1180	1200	200	125	45	970	20.6	4.58	4.0×8	3.4×6	3.0×5	2.2×4
MW92-14060L	1400	600	1200	1610	200	125	38	1248	32.4	7.13	4.0×11	3.4×9	3.0×8	2.2×6
MW92-16065L	1600	650	1100	1180	200	125	45	1740	36.4	8	5.0×13	4.3×11	3.7×10	2.7×7
MW92-19065L	1900	650	1246	2100	250	175	50	1996	45.5	10.0	5.0×16	4.3×14	3.7×12	2.7×9
MW92-21070L	2100	700	1300	2300	250	175	50	2800	45.5	10.0	6.0×18	5.0×15	4.0×13	3.3×10
MW92-10060L/G	1000	600	1000	1200	200	125	38	1160	14.9	3.3	4×8	3.4×6	3.0×5	2.2×4
MW92-12084L/G	1200	840	1050	1510	220	90	30	1580	18.5	4.07	4.0×10	3.4×9	3.0×8	2.2×6
MW92-14060L/G	1400	600	1025	1610	200	125	38	1300	25	5.5	4×11	3.4×9	3.0×8	2.2×6
MW92-16065L/G	1600	650	1200	1800	200	125	38	1800	30.5	6.7	5.0×13	4.3×11	3.7×10	2.7×7
MW92-16090L/G	1600	900	741	1860				3650	25.7	5.65	5.0×14	4.3×11	3.7×10	3.0×7
MW92-19065L/G	1900	650	1300	2100	250	175	50	2100	36.4	8	5.0×16	4.3×14	3.7×12	2.7×9
MW92-21070L/G	2100	700	1400	2300	250	175	50	3000	36.4	8	6.0×18	5.0×15	4.5×13	3.3×10

©Copyright 2007 YUXIANG Magnetic Materials Ind. Co.,Ltd.All Rights Reserved.